


**DROP BOWL
MOUNTING
POSITION**

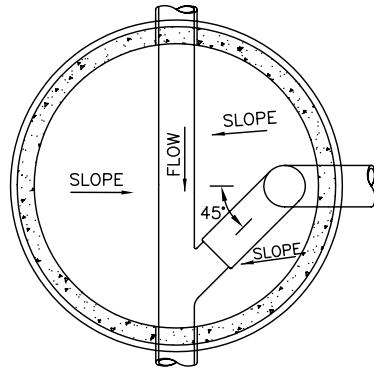

INSIDE DROP - PLAN

RELINER® INSIDE DROP
BOWL SECURED WITH
STAINLESS STEEL
BOLTS

TRIM PIPE TO 2" MAX.
V NOTCH BOTTOM EDGE


FERNCO FLEXIBLE
COUPLING OR EQUAL

RELINER® STAINLESS
STEEL STRAPS OR
EQUAL. SECURE TO
STRUCTURE WITH
2 STAINLESS STEEL
BOLTS. STRAP AT 4'
INTERVALS (MIN. OF 2)

COMPRESSION
COUPLING
MORTAR

PVC SEWER PIPE

GLUE FITTING
BELL & SPIGOT
SWEEP ELBOW
EMBEDDED IN
CONC. AT 45°
W/ SEWER FLOW

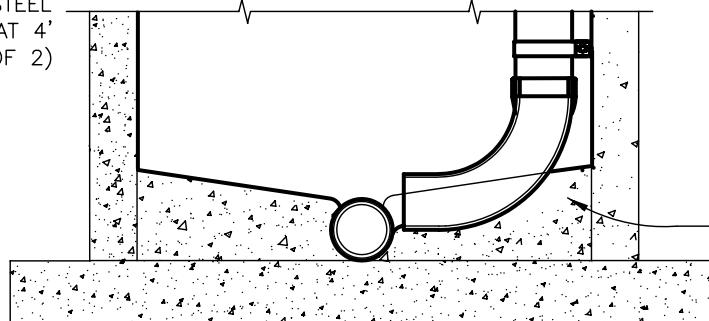

INSIDE DROP CONNECTION

NOTES:

1. ALL INSIDE DROP CONNECTIONS FOR SERVICES AND COLLECTOR SEWERS
SHALL USE THE DROP BOWL AS PRODUCED BY:
RELINER-DURAN, INC.
53 MT. ARCHER RD,
LYME, CT 06371
(860)434-0277 FAX: (860)434-3195
2. SECURE DROP PIPE TO MANHOLE WALL WITH RELINER-DURAN, INC STAINLESS
STEEL ADJUSTABLE CLAMPING BRACKETS.

RELINER - DURAN, INC.

53 MT. ARCHER ROAD, LYME, CT. 06371
(800) 508-6001 FAX: (860)434-3195

DESCRIPTION

**DROP
CONNECTIONS**

SCALE
NONE